

QUICK LIFT UBT Series – Self-Propelled Track Wheels Mini Scissor Lift

Unstoppable Performance on Any Terrain

Designed for superior mobility and stability in demanding environments

- ✓ Self-Propelled – Enhanced maneuverability for efficiency.
- ✓ Track Wheels System – Superior grip on uneven surfaces.
- ✓ Compact & Lightweight – Easy transport and access through tight spaces.
- ✓ Electric-Powered – Zero emissions for a greener workspace.
- ✓ High Load Capacity – Supports personnel and tools securely.
- ✓ Robust Stability – Ensures safety at height.

Models Available:

UBT10 | UBT12 | UBT15

Why Choose UBT Series?


Ideal for construction, maintenance, and industrial applications where mobility and stability are essential.

- ✓ **Forestry Management** – Ideal for tree trimming and canopy access.
- ✓ **Agricultural Operations** – Supports farm maintenance
- ✓ **Oil & Gas Facilities** – Safe access for maintenance in remote sites.
- ✓ **Disaster Relief & Recovery** – Reliable for rescue and repair in disaster-hit areas.
- ✓ **Construction & Infrastructure** – Optimal for rugged terrains and uneven surfaces.
- ✓ **Telecommunication & Utility Work** – Enables high-reach installations and repairs.

AHI Lifts (Malaysia) Sdn Bhd

No. 38, Jln Eco Perindustrian 1/2A, Eco Perindustrian 5,
42300 Bandar Puncak Alam, Selangor

Email: admin@ahilifts.com.my | Website: www.ahiliftsmy.com

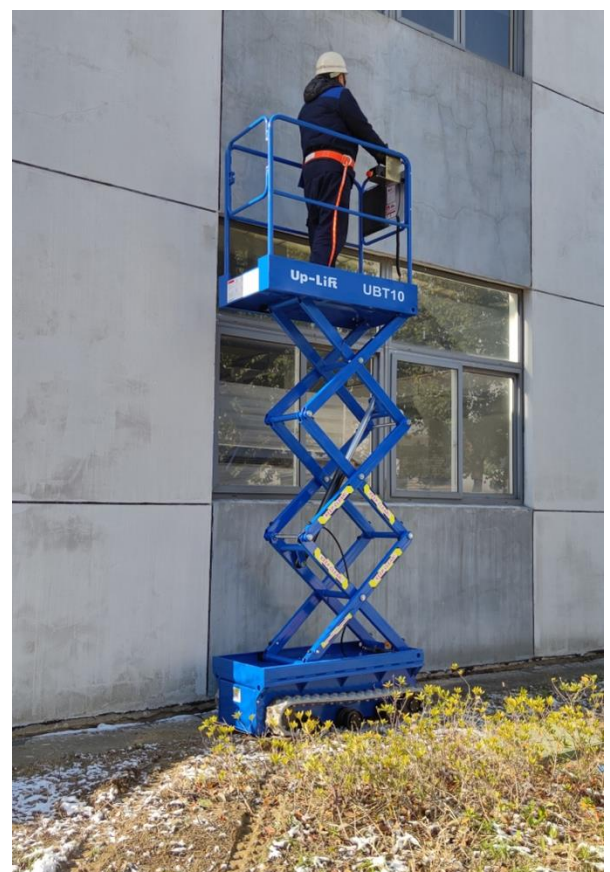

QUICK LIFT UBT Series Specification

Feature	UBT 10	UBT 12	UBT 15
Max Platform Height (m)	3.0	3.9	4.5
Max Working Height (m)	5.0	5.9	6.5
Rated Load (Kg)	200	200	160
Stored Dimensions (m)	1.39 x 0.79 x 1.87	1.39 x 0.79 x 1.97	1.39 x 0.79 x 2.07
Platform Dimensions (m)	1.28 x 0.65 x 1.1	1.28 x 0.65 x 1.1	1.28 x 0.65 x 1.1
Platform with Extension (m)	1.78 x 0.65 x 1.1	1.78 x 0.65 x 1.1	1.78 x 0.65 x 1.1
Battery (V/Ah)	2 x 12V 110Ah	2 x 12V 110Ah	2 x 12V 110Ah
Max Travel Speed (Lowed) (km/h)	0-4.0	0-4.0	0-4.0
Max Travel Speed (Raised to under 2m) (km/h)	0-0.8	0-0.8	0-0.8
Initial Platform Height (m)	0.76	0.86	0.96
Initial Step Height (m)	0.35	0.35	0.35
Total Weight (kg)	775	815	855
Driving Motor Power Rating (kW)	2 x 1.5	2 x 1.5	2 x 1.5
Max Manual Force (N)	200	200	200
Max Inclination (Degrees)	1.5	1.5	1.5
Gradeability (%)	25	25	25
Product Image	